

我們從事的專業
一切皆與膜技術相關
全新一代膜技術淨化過濾器系統

www.jingyuan.hk

JINGYUAN.hk
Membrane Filter System
Filtration, Purification & Separation Solutions

MICROPOROUS MEMBRANE MATERIALS

Diesel Fuel Filtration

晶元®

膜過濾器系統

New Generation Membrane Separation Refined Filtration System

型号 Model: JY-219A

工作压力 Working Pressure: 0.2~0.3Mpa

流量 Flow Rate(According to oil quality): 50L/min (max)

滤芯精度 Precision: 5~25μm


滤芯材质 Filtering material: Polymer membrane materials

电压 DC12V/24V/220V

接口尺寸 Flange Mouth: DN25

适用油品 Apply to oil: Diesel fuel, Aviation fuel


尺寸 Measurement: 370×450×750mm



JY-219A

油品净化过滤器

Diesel Fuel Filtration

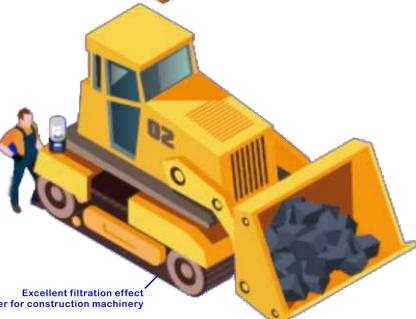

Filter Technology Solutions Partner

主要特点/FEATURES

Can effectively intercept and separate impurities, colloid, water and micro particles in oil. The oil becomes clear and transparent after filtration, and the cleanliness level is greatly improved, effectively extending the service life of mechanical equipment. Comply with the national environmental protection regulations, no pollution consumables, no diesel consumption, no need to clear sand and slag. The polymer membrane filter elements can be used repeatedly after blowing, save the cost of consumables. The equipment operation is simple, and there is a professional after-sales team tracking service, let you have no worries. Applicable to construction machinery, agricultural machinery, mining machinery and the need for fuel oil filtration site.

Jingyuan has a one-stop product development and production system from the development of membrane materials to finished products. To provide users with satisfactory dedicated filters and their systems.

MICROPOROUS MEMBRANE MATERIALS (膜型号及規格)

Membrane filter order models	Nominal Pore Size
J22-330 L/H	0.5~15 μ m
J22-400 L/H	0.5~25 μ m
J30-970 L/H	0.5~15 μ m
J30-980 L/H	0.5~25 μ m



晶元滤膜(沈阳)有限公司

SHENYANG JINGYUAN MEMBRANE SYSTEMS CO.,LTD.

www.jingyuan.hk

info@jingyuan.hk

工厂地址: 辽宁省铁岭懿路工业园区桃李沟路19号

电话: 024-78715999 139 0405 2025

