

我們從事的專業
一切皆與膜技術相關
全新一代膜技術淨化過濾系統

www.jingyuan.hk

Membrane Filter System
JINGYUAN.hk
Filtration, Purification & Separation Solutions


晶元
Advanced Membrane Material
Industrial Oil Filtration



JY-G100

工业油品净化过滤器

Oil Filtration System

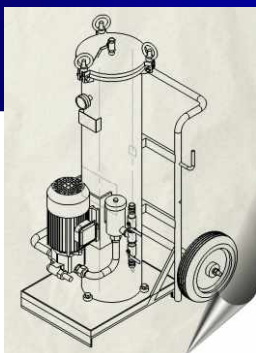

Industrial Oil Filtration

Excellent filtration effect
The must choose filtration equipment for machinery



MICROPOROUS MEMBRANE MATERIALS

晶元®
膜过滤系统

New Generation Membrane Separation Refined Filtration System

- 型号 Model Type : JY-G100
- 流量 Flow Rate : 15~30L/min
(According to viscosity and temperature)
- 过滤精度 Precision : 2~10 μm (Adjustable)
- 过滤材料 Filtration Material : Polymer Membrane
(Can be used repeatedly after washed)
- 工作压力 Working Pressure : 0.2~0.3Mpa
- 工作温度 Temperature Range : -10°C~70°C
- 过滤级数 Filtration Classification: Three
(Pre-filtration/Magnetic Filtration/Refined Filtration)
- 适用油品 Suitable Oil : Hydraulic oil, engine oil, gear oil
(Petroleum or Mineral Base Oil)
- 粘度 Viscosity : 320# Gear oil
- 电源 Voltage : 380V(Continuous Work for long time)
- 尺寸 Measurement : 800×750×1350mm
- 重量 Weight : 125kg



JY-G100

Filter Technology Solutions Partner

主要特点/FEATURES

- Can effectively intercept and separate impurities, colloid, water and micro impurity particles in oil
- Break the emulsified structure, the oil becomes clear and transparent after filtration, and the service life of oil is greatly improved
- Comply with the national environmental protection regulations, no pollution consumables, no oil consumption, no need to clear sand and slag
- The polymer membrane filter elements can be used repeatedly after blowing, save the cost of consumables
- The equipment operation is simple, and there is a professional after-sales team tracking service, let you have no worries
- Be suitable for hydraulic oil, engine oil, lube oil, gear oil and other industrial oil



Jingyuan has a one-stop product development and production system from the development of membrane materials to finished products
To provide users with satisfactory dedicated filters and their systems

MICROPOROUS MEMBRANE MATERIALS (膜型号及规格)

| Membrane filter order models | Nominal Pore Size |
|------------------------------|-------------------|
| J22-330 L/H | 0.5~15 μm |
| J22-400 L/H | |
| J30-970 L/H | |
| J30-980 L/H | 0.5~25 μm |

www.jingyuan.hk

info@jingyuan.hk

晶元濾膜(沈陽)有限公司
SHENYANG JINGYUAN MEMBRANE SYSTEMS CO.,LTD.

工厂地址: 辽宁省铁岭懿路工业园区桃李沟路19号
电话: 024-78715999 139 0405 2025



www.jingyuan.hk

024-78715999